

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)

PCT

(10) International Publication Number
WO 2005/121885 A1

(51) International Patent Classification⁷: **G02F 1/167**

(JP). MORI, Hideo [JP/JP]; 3-16-41, Gumizawa, Tot-suka-ku, Yokohama-shi, Kanagawa 245-0061 (JP).

(21) International Application Number:
PCT/JP2005/010737

(74) Agent: YAMADA, Ryuichi; Toko International Patent Of-fice, Hasegawa Building 4F, 7-7, Toranomom 3-chome, Mi-nato-ku, Tokyo 105-0001 (JP).

(22) International Filing Date: 6 June 2005 (06.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-169112 7 June 2004 (07.06.2004) JP

(71) Applicant (for all designated States except US): CANON
KABUSHIKI KAISHA [JP/JP]; 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo 146-8501 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): ITO, Hikaru [JP/JP]; 19-2-A906, Ueki, Kamakura-shi, Kanagawa 247-0073 (JP). YOSHINAGA, Hideki [JP/JP]; 4362-23, Izumicho, Izumi-ku, Yokohama-shi, Kanagawa 245-0016

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: ELECTROPHORETIC DISPLAY DEVICE

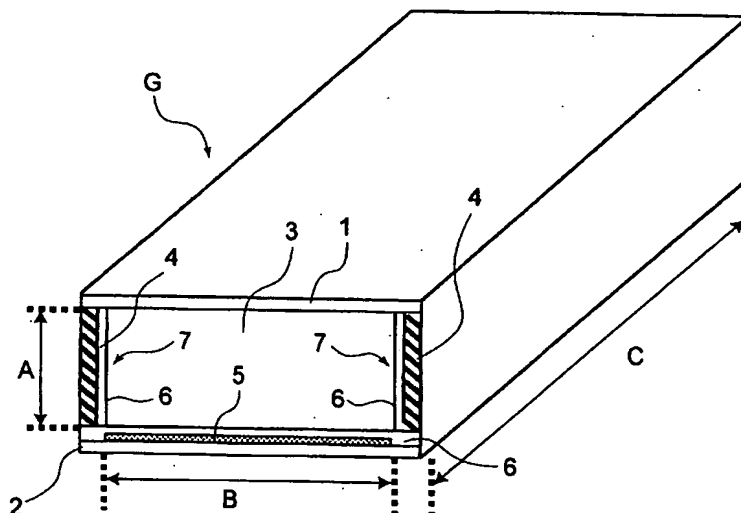

(57) Abstract: An electrophoretic display device is constituted by a first substrate and a second substrate which are disposed with a spacing therebetween, a partition wall disposed in the spacing, electrophoretic particles sealed in a closed space defined by the first and second substrates and the partition wall, a first electrode disposed a side surface of the closed space, and a second electrode disposed at a bottom surface of the closed space. In the electrophoretic display device, a distribution state of the electrophoretic particles is changed to effect display, and the first electrode has an area substantially equal to or larger than an area of the second electrode.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*